


ČELIČNE PRIVEZNICE DIN 3088, 1-krak, 2-kraka, 3-kraka, 4-kraka


NOSIVOST ČELIČNIH PRIVEZNICA DIN 3088

Faktor sigurnosti : 5

Izrada različitih dužina i završetaka



Promjer užeta (mm)	Jedan krak (t)	Dva kraka (t)		Tri kraka(t)		Četiri kraka (t)		Beskonačne (t)
	0°	0°-45°	45°-60°	0°-45°	45°-60°	0°-45°	45°-60°	
8	0.70	0.95	0.70	1.50	1.05	1.50	1.05	1.10
10	1.05	1.50	1.05	2.25	1.60	2.25	1.60	1.70
12	1.55	2.12	1.55	3.30	2.30	3.30	2.30	2.50
14	2.12	3.00	2.13	4.35	3.15	4.35	3.15	3.30
16	2.70	3.85	2.70	5.65	4.20	5.65	4.20	4.35
18	3.40	4.80	3.40	7.20	5.20	7.20	5.20	5.65
20	4.35	6.00	4.35	9.00	6.50	9.00	6.50	6.90
22	5.20	7.20	5.20	11.00	7.80	11.00	7.80	8.40
24	6.30	8.80	6.30	13.50	9.40	13.50	9.40	10.00
26	7.20	10.00	7.20	15.00	11.00	15.00	11.00	11.80
28	8.40	11.80	8.40	18.00	12.50	18.00	12.50	13.50
30	9.50	13.50	9.50	20.00	14.00	20.00	14.00	15.00
32	11.00	15.00	11.00	23.50	16.50	23.50	16.50	18.50
34	12.50	17.00	12.50	26.00	19.00	26.00	19.00	20.00
36	14.00	19.00	14.00	29.00	21.00	29.00	21.00	22.50
38	15.50	21.50	15.50	32.50	23.00	32.50	23.00	25.00
40	17.00	-	-	-	-	-	-	-
42	19.00	-	-	-	-	-	-	-
44	21.00	-	-	-	-	-	-	-
46	23.00	-	-	-	-	-	-	-
48	25.00	-	-	-	-	-	-	-

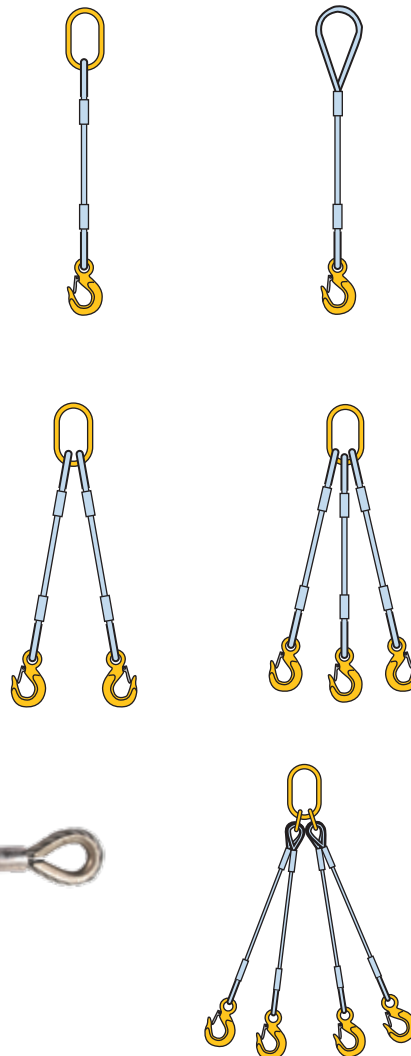

ČELIČNE PRIVEZNICE

